

Classification of electromagnetic resonances in finite inhomogeneous three-dimensional structures

Neil V. Budko

*Laboratory of Electromagnetic Research, Faculty of Electrical Engineering, Mathematics and Computer Science,
Delft University of Technology, Mekelweg 4, 2628 CD Delft, The Netherlands**

Alexander B. Samokhin

*Department of Applied Mathematics, Moscow Institute of Radio Engineering, Electronics,
and Automatics (MIREA), Verndasky av. 78, 117454, Moscow, Russian Federation†*

(Dated: February 2, 2008)

We present a simple and unified classification of macroscopic electromagnetic resonances in finite arbitrarily inhomogeneous isotropic dielectric 3D structures situated in free space. By observing the complex-plane dynamics of the spatial spectrum of the volume integral operator as a function of angular frequency and constitutive parameters we identify and generalize all the usual resonances, including complex plasmons, real laser resonances in media with gain, and real quasi-static resonances in media with negative permittivity and gain.

It is hard to overestimate the role played by macroscopic electromagnetic resonances in physics. Phenomena and technologies such as lasers, photonic band-gap materials, plasma waves and instabilities, microwave devices, and a great deal of electronics are all related or even entirely based on some kind of electromagnetic resonance. The usual way of analysis consists of deriving the so-called dispersion equation, which relates the wave-vector $\mathbf{k}$ or the propagation constant $|\mathbf{k}|$ of a plane electromagnetic wave to the angular frequency ω . The solutions of this equation may be real or complex. In the first case we talk about a *real resonance*, i.e. such that can be attained for some real angular frequency and therefore, in principle, results in unbounded fields. In reality, however, amplification of the fields is bounded by other physical mechanisms, e.g. nonlinear saturation. If solution is complex, then we have a *complex resonance* and, depending on the sign of the imaginary part, the associated fields are either decaying or growing with time. This common approach is rather limited and does not include all pertaining phenomena. Indeed, more or less explicit dispersion equations can only be obtained for infinite (unbounded) homogeneous media, as often done in plasma and photonic studies. Other approaches impose explicit boundary conditions and can handle resonators and waveguides with perfectly conducting walls, and idealistic piece-wise homogeneous objects (e.g. plane layered medium, circular cylinders, a sphere). On the other hand, very little can be said in the general case of a finite inhomogeneous dielectric object situated in free space. Due to the absence of an explicit dispersion equation and explicit boundary conditions, even the existence and classification of resonances in such objects is still an open problem.

We describe here an alternative mathematically rigorous approach to electromagnetic resonances, based on the volume integral formulation of the electromagnetic scattering, also known as the Green's function method

and the domain integral equation method. This formulation is equivalent to the Maxwell's equations and is perfectly suited for bounded inhomogeneous objects in free space. Despite its generality, nowadays the volume integral equation is mostly used as a numerical tool, for instance, in near-field optics and geophysics. The main limitation seems to be the implicit mathematical structure of this equation resisting any straightforward analysis and interpretation. Recently, however, we have succeeded in deriving useful mathematical bounds on the spatial spectrum of the volume integral operator proving, in particular, that along with the usual discrete eigenvalues this operator has a dense essential spectrum as well [1]. Below we reiterate our results and show how to use them in the analysis of resonances. Then, we proceed with a step by step classification of all known complex and real resonances. In particular, we generalize the notion of a complex plasmon, real laser resonance, and a real quasi-static resonance in an exotic material containing a negative permittivity part and a part with gain. Recently, several authors have suggested [2]–[6] that this type of material may be an answer to some urgent technological questions ranging from surface plasmon lasers (SPASER) to loss compensation in media with negative refraction (perfect lens). We believe that our analysis provides a necessary generalization and a handy analytical tool for these and other studies, especially in what concerns the resonant light confinement.

The frequency-domain Maxwell's equations describing the electromagnetic field in a non-magnetic isotropic inhomogeneous object occupying finite spatial domain D lead to the following strongly singular integral equation:

$$\mathbf{E}^{\text{in}}(\mathbf{x}, \omega) = \left[\mathbb{I} + \frac{1}{3} \chi(\mathbf{x}, \omega) \right] \mathbf{E}(\mathbf{x}, \omega) - \lim_{\epsilon \rightarrow 0} \int_{\mathbf{x}' \in D \setminus |\mathbf{x} - \mathbf{x}'| < \epsilon} \mathbb{G}(\mathbf{x} - \mathbf{x}', \omega) \chi(\mathbf{x}', \omega) \mathbf{E}(\mathbf{x}', \omega) d\mathbf{x}', \quad (1)$$

where $\mathbb{I}$ denotes a unit tensor (3×3 identity matrix), whereas the explicit form of the Green's tensor $\mathbb{G}$ is of no importance here, but can be found in [7] and [8]. Here, $\mathbf{E}^{\text{in}}$ is the incident field in vacuum background, where the wavenumber is $k_0 = \omega/c$, and the total electric field in the configuration is denoted by $\mathbf{E}$. Constitutive parameters of the object are contained in the so-called contrast function $\chi(\mathbf{x}, \omega) = \varepsilon_r(\mathbf{x}, \omega) - 1$, where ε_r is the relative dielectric permittivity of the object. In operator notation equation (1) can be written simply as

$$Au = u^{\text{in}}. \quad (2)$$

The spatial spectrum of operator A is defined as a set $\sigma(\lambda)$ of complex numbers λ for which operator

$$[A - \lambda I]^{-1} \quad (3)$$

fails to exist in one or another way. We need to distinguish here two cases. The first is when for some λ the homogeneous equation $[A - \lambda I]u_\lambda = 0$ has a nontrivial solution $u_\lambda \neq 0$. In addition, this solution has a finite norm, i.e. $\|u_\lambda\| < \infty$. If the latter condition is satisfied, then λ is called an *eigenvalue* and the corresponding u_λ – an *eigenfunction* (*eigenmode*). It happens that eigenvalues constitute, although possibly infinite, but *discrete* subset of the complex plane – a set of isolated points, in other words.

The second case is when equation $[A - \lambda I]u_\lambda = 0$ is formally satisfied by some u_λ , which either does not have a bounded norm, i.e. $\|u_\lambda\| \rightarrow \infty$, or is localized to a single point in space. The set of λ 's corresponding to such cases is often a dense subset of the complex plane, sometimes referred to as *essential* spectrum. An even more rigorous analysis would also require distinction between the *continuous* and the *residual* spectra, however, so far we cannot come-up with a simple formal rule to identify and separate them in the electromagnetic case. It is quite easy to find the physical interpretation of $\|u_\lambda\| \rightarrow \infty$. For example, in the L^2 norm suggested by the electromagnetic energy considerations (Pointing's theorem), such functions are a plane wave and the Dirac's delta function, which both have infinite L^2 norms. The essential spectrum associated with plane waves is common for infinite periodic structures, where it surrounds photonic band gaps, and in infinite plasma models, where it gives rise to certain types of plasma waves.

In [1] we prove that the strongly singular integral operator of equation (1) has both the dense essential spectrum and the discrete eigenvalues. Moreover, for any inhomogeneous object with $\chi(\mathbf{x}, \omega)$ Hölder-continuous in $\mathbb{R}^3$ (i.e. inside the object as well as across its outer boundary) the essential spectrum λ_{ess} is given explicitly as

$$\lambda_{\text{ess}} = \varepsilon_r(\mathbf{x}, \omega), \quad \mathbf{x} \in \mathbb{R}^3. \quad (4)$$

In other words λ_{ess} will consist of all values of ε_r , which it admits in $\mathbb{R}^3$. Thus it will always contain the real

unit, since it is the relative permittivity of vacuum, and a curve or even an area of the complex plane emerging from the real unit and running through all other values, which macroscopic ε_r takes inside the object. This part of the spectrum does not depend on the object's size or shape, or even the relative volume occupied by different inhomogeneities.

In addition to the essential spectrum operator A has the usual discrete eigenvalues located within the following wedge-shaped bounds:

$$\begin{aligned} &\text{Im } \varepsilon_r(\mathbf{x}, \omega) [1 - \text{Re } \lambda] + \\ &[\text{Re } \varepsilon_r(\mathbf{x}, \omega) - 1] \text{Im } \lambda \leq 0, \quad \mathbf{x} \in D. \end{aligned} \quad (5)$$

It is also known that $|\lambda| \leq \|A\|$, and that $\|A\| < \infty$ for any χ , Hölder-continuous in $\mathbb{R}^3$. Exact distribution of eigenvalues in the complex plane is unknown to us and depends on the object's shape. The eigenfunctions (modes) associated with these eigenvalues are global (not localized) and, in general, can only be found numerically.

To use these results in the analysis of electromagnetic resonances we note that both the essential spectrum and the eigenvalues are parametric functions of the angular frequency ω . In general, a perfect (real) resonance would occur, if for some ω the spatial spectrum of A would acquire a zero eigenvalue. If, on the other hand, for some ω the spatial spectrum does not contain zero, but gets close to it, while moves away for other ω 's, then we have a complex resonance. With this in mind, one should try to visualize the dynamics of the spatial spectrum as it 'moves' in the complex plane, paying attention to the eigenvalues and portions of essential spectrum, which first approach zero and then move away from it. Expression (4) is very important in this respect as it tells us that the motion of essential spectrum is explicitly related to the temporal dispersion of the relative permittivity. We also know (see below) that the eigenfunctions related to this spectrum are highly localized. Thus from (4) and the known spatial distribution of $\varepsilon_r(\mathbf{x}, \omega)$ we can immediately tell where exactly in D would a local resonance occur. The motion of discrete eigenvalues, on the other hand, is quite unpredictable, with the general tendency to spread out at higher frequencies. While doing so, some of these eigenvalues may pass through or close to zero, which will be an indication of a global resonance. We propose here a useful rule of thumb for visualizing the eigenvalue bound (5). Imagine a line drawn through the real unit and any value of ε_r inside the object. If you now stand in the complex plane and look from the real unit towards that value of ε_r , then the eigenvalues can only be to your right.

Finally, we have also been able to prove that in the static limit $\omega \rightarrow 0$ or $D \rightarrow 0$ all discrete eigenvalues are located within the convex envelope of essential spectrum

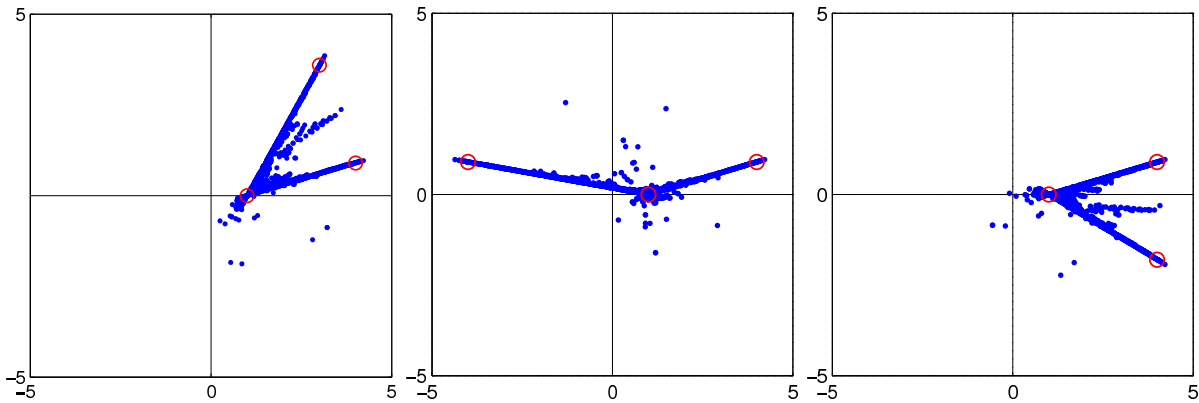


FIG. 1: Known resonances as seen in the numerical spectrum for various inhomogeneous objects. Left: object with losses (complex wave-like resonances). Middle: object with strong anomalous dispersion (complex plasmon resonance). Right: object with lossy and gain parts (real wave-like laser resonance).

[9], and are given by

$$\lambda = \frac{\int_{\mathbf{x} \in D} \varepsilon_r(\mathbf{x}, \omega) |\nabla \varphi_\lambda(\mathbf{x})|^2 d\mathbf{x}}{\int_{\mathbf{x} \in D} |\nabla \varphi_\lambda(\mathbf{x})|^2 d\mathbf{x}}, \quad (6)$$

where φ_λ is a scalar static mode. Formally, our essential spectrum (4) can be derived from this expression as well, by taking $|\nabla \varphi_\lambda(\mathbf{x})|^2 \sim \delta(\mathbf{x} - \mathbf{x}')$. This also proves that the eigenfunctions associated with the essential spectrum are highly localized in space. Another important observation is about the discrete eigenvalues *outside* the convex envelope of essential spectrum. Since those do not exist in the quasi-static regime and appear only at higher frequencies and object sizes, we may conclude that the corresponding eigenfunctions are not of static type, but more of the wave-like type, i.e. oscillating in space.

Now, we have everything we need for a unified description of resonances. We shall illustrate our conclusions by numerically computed spectra for an inhomogeneous cube consisting of two equal halves with different permittivity values. The side of the cube is half of the vacuum wavelength.

In objects consisting of lossy dielectric materials only complex resonances can be observed. For example, in Fig. 1 (left) we show the spectrum for the case of a lossy dielectric with both $\text{Re} \varepsilon_r > 0$ and $\text{Im} \varepsilon_r > 0$. The actual values of relative permittivity and the real unit are given as circles. Numerical equivalent of essential spectrum (there is no such thing as dense or continuous spectrum with matrices) always looks like a set of line segments emerging from the real unit [1]. One should simply keep in mind that in a continuously inhomogeneous object this spectrum may be a rather arbitrary curve or an area. Other, off-line eigenvalues are within the bounds prescribed by (5). As the angular frequency varies, some of these latter off-line eigenvalues may get close, but not equal to zero. These are the complex resonances, corresponding to complicated global wave-like spatial modes.

In Fig. 1 (middle) we illustrate the case where due to strong anomalous dispersion one of the object's parts has $\text{Re} \varepsilon_r < 0$ and $\text{Im} \varepsilon_r > 0$ at a certain angular frequency. The line of essential spectrum proceeds close to the zero of the complex plane. For other angular frequencies this line will move away from zero. It is well-known that this combination of materials supports complex plasmon resonances. Hence, we may safely conclude that we deal here with one of them. As an extra confirmation we see that this resonance is related to the highly localized modes of essential spectrum. Further we conclude that, in general, complex plasmons may exist not only at an interface between two homogeneous objects, but along rather arbitrary surfaces inside a continuously inhomogeneous object with strong anomalous dispersion. The precise location of this surface is determined by that value of ε_r inside D , which appears to be the closest to zero.

Recalling the rule of thumb about the location of eigenvalues we realize that a discrete eigenvalue can be equal to zero, only if the relative permittivity at some point inside the object happens to have a negative imaginary part, i.e. $\text{Im} \varepsilon_r < 0$. This corresponds to the so-called negative losses or gain as in pumped laser media. In Fig. 1 (right) the numerical spectrum for a cube with one lossy half and another half with gain is shown. Two of the discrete eigenvalues are very close to zero, meaning that the whole configuration is in the vicinity of a real laser resonance. It is, however, very hard to come up with an exact real resonance in this way. For a given temporal dispersion of the medium, one has to optimize the geometrical parameters of the object until the resonance is achieved, which is a very challenging numerical problem. One thing we can be sure about, though: for such configurations the zero eigenvalue will always be *outside* the convex envelope of the essential spectrum. Therefore, real laser resonances correspond to wave-like spatial modes and, thus, can only be achieved in structures whose size is comparable to or greater than the

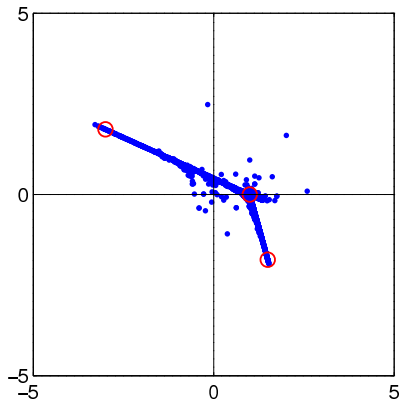


FIG. 2: Real quasi-static resonance in an object with negative permittivity and gain.

medium wavelength. This is confirmed by the standard theory of lasers.

As we already mentioned in the beginning, combination of a negative permittivity material and a material with gain is an attractive candidate for several applications. In the quest for a perfect lens [6] the gain is supposed to compensate for the inevitable losses in the frequency band where the negative permittivity is achieved. Plasmons, which are considered to be ideal candidates for the sub-wavelength manipulation of light, suffer from losses as well. Here too, combination with a gain medium is supposed to compensate for the losses. Some authors argue that in this way the surface plasmon amplification by stimulated emission of radiation (SPASER) can be achieved, similar to the usual laser [2]–[5]. While all this is true, and our bounds show that real resonances may exist in such media, we can explicitly show that these resonances are not necessarily the localized lossless plasmons, but may as well be associated with global modes. Consider the spatial spectrum corresponding to this case – see Fig. 2. The upper branch of the essential spectrum is indeed approaching zero as with the usual complex plasmon. In a continuously inhomogeneous object there may be essential spectrum going right through zero in this case. Hence, perfect real plasmons are possible in classical electromagnetics (at least mathematically). However, in Fig. 2 it is the *discrete* eigenvalue, which is now the closest to zero, and it has a global eigenfunction associated with it, not a localized one. Our numerical calculations confirm that the complex plasmon mode and the

mode of this real resonance indeed look different. Note also that the angular frequency of this resonance may in practice coincide with the one of plasmon. There is an important difference, though, between the real laser resonances described above and the present resonance. If the medium parameters are such that the zero of the complex plane is situated *inside* the convex envelope of the essential spectrum, then a real *quasi-static* resonance can be achieved. Hence, the mode may be confined to a very small volume, if the object's volume is small. It may even be enough to reduce the volume of the part with gain only to achieve confinement.

In summary, we have presented a unified approach to macroscopic electromagnetic resonances in finite inhomogeneous three-dimensional objects. We have analyzed the dynamics of the spatial spectrum of the pertaining volume integral operator as a function of the angular frequency and constitutive parameters, and were able to recover and generalize all known resonances in this way. In addition, we have confirmed the possibility and established conditions for the existence of a real quasi-static resonance in media with negative permittivity and gain leading to the volume-dependent light confinement.

* Electronic address: n.budko@ewi.tudelft.nl

† This research is supported by NWO (The Netherlands) and RFBR (Russian Federation).

- [1] N. V. Budko and A. B. Samokhin, (under review) *SIAM J. Sci. Comp.*, also see Arxiv version: math-ph/0505013 (2005).
- [2] M. I. Stockman, S. V. Faleev, and D. J. Bergman, *Phys. Rev. Lett.* **87**, 167401 (2001).
- [3] D. J. Bergman and M. I. Stockman, *Phys. Rev. Lett.* **90**, 027402 (2003).
- [4] M. P. Nezhad, K. Tetz, Y. Fainman, *Optics Express*, **12**, 4072–4079 (2004).
- [5] J. Seidel, S. Grafstöm, L. Eng, *Phys. Rev. Lett.* **94**, 177401 (2005).
- [6] S. A. Ramakrishna and J. B. Pendry, *Phys. Rev. B* **67**, 201101(R) (2003).
- [7] J. Rahola, *SIAM J. Sci. Comp.*, Vol. 21, No. 5, pp. 1740–1754 (2000).
- [8] A. B. Samokhin, *Integral Equations and Iteration Methods in Electromagnetic Scattering*, VSP, Utrecht, 2001.
- [9] N. V. Budko and A. B. Samokhin, (accepted) *Differential Equations*, (2005).